


Accessories

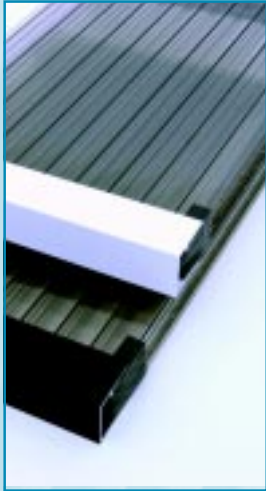

Sheet Closure Extrusion

The PVC sheet closure extrusion is used to protect and finish the bottom edge of the polycarbonate glazing sheet next to the gutter. It is designed so that a 2mm air gap is naturally created. The sheet closure does not negate the need for breather anti dust tape.

The sheet closure should be cut to fit between glazing bar top caps. Ensure the sides of the glazing bar ends flush with the closure. The closure can be clipped all along the bottom of the glazing sheet. If this method is used then the end of the glazing bar abuts the closure.

It is advisable to apply a bead of silicone to the upper edge of the sheet closure extrusion, paying particular attention to the joint formed between the closure and the glazing bar.

Polycarbonate Sheet thickness	White £	Brown £
10mm	3.00	3.00
16mm	3.00	3.00
25mm	4.00	4.00

Sheet closure extrusion is available in 2.1m lengths



Eaves Filler

Where a roof crosses the front elevation to fall into the gutter, a gap is naturally created. The optional eaves filler takes up this gap and prevents draughts. The eaves filler is coloured White on one side and Brown the other.

Guide Price 1.0 metre length at £1.50 each



Screw Buttons

Buttons are used to give additional fixing strength, particularly where a high wind loading is a consideration. They are screwed through the sheet into a purlin. Remember to oversize the pre-drilled holes by 3mm. **Do not over tighten the buttons.** It is recommended that holes are drilled off the substructure as this helps prevent swarf entering the glazing sheet flutes

Guide Price per 10 buttons: White or Brown = £3.50

Prices are exclusive of VAT unless otherwise stated
valid from 01-01-06



to order, or for further information please contact:

Tel: +44 (0) 1769 574426 Fax: +44 (0) 1769 574459 Email: info@omegabuild.com www.omegabuild.com

Accessories continued



Solid Aluminium Top Tape and Breather Anti-dust Tape

It is important to tape all open flutes on polycarbonate glazing sheet.

The solid tape is usually applied to the top edge of the sheet, i.e. house end

The breather tape is applied to the bottom of the sheet i.e. gutter end.

It is important where a hip roof is being formed or triangles are being cut, open flutes be taped with solid aluminium top tape to prevent dirt, dust and insects entering the sheet.

Guide Price Tapes are sold by the metre.

Solid top aluminium tape £0.15 per metre

Breather anti-dust tape £0.50 per metre



Silicone Sealant

Specially formulated non acid silicone for use with Polycarbonate glazing sheets.

Guide Price per 310ml tube of silicone sealant = £4.10 each



Self Adhesive Flashing

For use instead of standard lead flashing without all the work of dressing to a chase.

This band 150mm wide (6 inches) is compatible with polycarbonate and provides a permanent and easily fixed solution where the glazed roof abuts a wall. Made by Sellotape, it carries a manufacturer's guarantee of 20 years.

Guide Price £4.00 per metre

Prices are exclusive of VAT unless otherwise stated
valid from 01-01-06



to order, or for further information please contact:

Tel: +44 (0) 1769 574426 Fax: +44 (0) 1769 574459 Email: info@omegabuild.com www.omegabuild.com