

## Secondary Glazing Fixings

### Smartframe

#### White Glazing Strips


- 1.0M
- 1.5M
- 2.0M
- 2.5M



- Suitable for 2 or 4mm glazing.
- Glass, acrylic or polycarbonate.
- Supplied with screw fixings.

### Easy Fix

- **Easyfix 15M kit**
- **Easyfix 5M kit**
- **Easyfix Edging 30M roll**

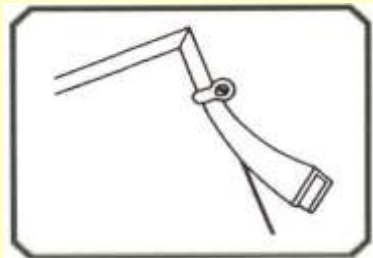

- **Easyfix Clips (12)**
- Suitable for 2-4mm acrylic, plate polycarbonate and glass.
- Pack includes 15M roll of flexible edging, 72 nylon clips and wood screws, a mitre tool and fitting instructions. Available in white, clear or brown.
- The flexible edging is used to frame the panel and it is then held in place by the nylon clips and screws. You need to ensure you allow at least 10mm around the outside of the secondary glazing panel for the clips.
- Ideal where the surface is not high gloss, is slightly uneven, or slightly damp.

### OM25 Magnetic glazing tape

- 30m length roll
- 15m length roll
- 5m length roll



- Suitable for 2-4mm acrylic or plate polycarbonate
- Pack consists of a 12.7mm wide magnetic tape and a 13mm steel tape with double sided adhesive.
- The steel tape attaches to the window frame and the magnetic tape to the secondary glazing sheet. The tapes are only 2mm thick.
- Ideal solution where you do not want the secondary glazing to protrude too much


### Framed Magnetic tape



- Suitable for 2-4mm acrylic or plate polycarbonate.
- Packs consists of a 2.44m long magnetic backed white or brown upvc clip frame and a white steel tape which attach onto each other with fitting instructions.
- The double sided adhesive tape fixes the steel tape to the window frame and the magnetic tape clips onto the secondary glazing panel. You need 15mm of flat mountable surface around your window frame to fix the strip.
- Ideal solution where you require a frame effect and want the benefit of magnetic tape for easy fitting and removing the panel.

## Secondary Glazing Fixings (cont.d)

### Superglaze

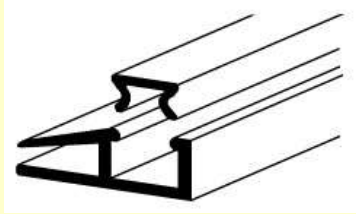

- Suitable for 2-4mm glass, acrylic or polycarbonate
- Pack includes a 2.44M white or brown upvc strip and fitting instructions
- The strip clips onto the edge of the glazing and is then screwed onto your window frame. The clip in strip covers the screws.
- Ideal for surfaces that are not high gloss or where you do not need to easily remove the panels.
- If using with 4mm please note the strip is a very tight fit.

### OM24 UPVC Glazing Strip




- Suitable for 2-4mm acrylic or plate polycarbonate.
- Pack includes the 1.83M base with double sided adhesive and white clip in top cap.
- The double sided adhesive tape means it can be fixed to either metal or wooden frames securely. For larger wooden windows it is recommended that the strip is screw fixed. The strip is 23mm wide and protrudes over the edge of the glazing panel by 13mm
- Ideal where you require a frame effect and for when you want the added security of screwing into the frame.

### 10 sachets of IPA cleaner

- Ideal for cleaning surface ready for adhesive

## Measuring Tips

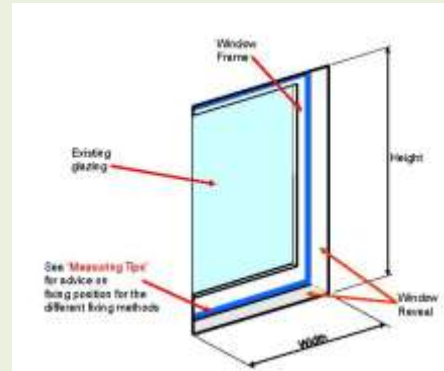

We offer a free cut to size service. Just give us the dimensions at time of order. Our saw cuts to a tolerance of +/-3mm. When considering on where to place/fit the secondary glazing panel please consider the following.

- Any unevenness on the edges of your reveal
- The ease of fitting and removing the panels

In the case of the above it is advisable to not place the secondary glazing tight to the outside edge of the frame.

### Smartframe glazing strip

Deduct 30mm from outside edge of where you want the frame to sit for the glazing panel size. It is important that there is a clean flat surface all the way round to ensure a good fit. Please ensure that all window furniture e.g. handles etc. fit within the recess.

### OM24 upvc glazing strip

Deduct 26mm per dimension from the external dimensions of the window frame/outside edge of where you want the secondary glazing frame to sit.

### OM25 magnetic glazing tape

We need the external dimensions of where you want the secondary glazing to sit. The magnetic and steel tapes are 13mm wide so ensure there is enough space on the frame to accommodate this.

### Easyfix

The clips take up 10mm on each side. Therefore deduct 20mm per dimension from the external dimensions of the window frame/outside edge of where you want the secondary glazing frame to sit.

### Framed Magnetic tape

Deduct 8mm per dimension from the external dimensions of the window frame/outside edge of where you want the secondary glazing frame to sit. The framed magnetic tape needs a flat mountable surface of 16mm around the window frame.